



RENAISSANCE COOKING SYSTEMS

Infrared Burner Installation Guide

CAUTION:

Make sure the gas supply to the grill is off and the grill is not warm/hot to the touch
When the infrared burner is on you MUST KEEP YOUR GRILL HOOD FULLY OPEN

Step 1

Removing the Left Burner

- Remove the cooking grids out of your grill.
- Remove the **left** heat tent or **left** briquette tray from your grill.
- Premier Series** - Remove the phillips head screw that holds the burner in place from the back of the burner. Remove the cross over bracket next to the left burner.
Cutlass Series - Remove the cotter pin from the back of the burner.
Cutlass Pro Series - Remove the cotter pin from underneath the back of the burner
- Remove the burner from the grill

Step 2


Installing the Infrared Burner

- Slide the venturi tube into the control panel hole and center over the valve.
- Use the two screws that you removed from the grills cross over bracket to secure burner.
- Lift the back of the burner up between 1/2" to 3/4" inch (see picture below) and place the screws in the two holes. Use a phillips screw driver to tighten the screws.
- Do not place the briquette tray over the infrared burner, this will damage the briquette tray.
- Replace the cooking grids and turn on the gas to the grill.

Cutlass & Cutlass Pro Series

- Hold the two burner shields while removing the plastic wrap off the burner.
- Install the infrared burner with the venturi tube going into the housing over the valve and the back of the burner resting on the back plate.
- Line up the back of the burner with the hole in the middle of the grill bracket
- You will not use the heat tent with the infrared burner
- Replace the cooking grid over the burner and turn on the gas to the grill.

RJC Installation Pictures below

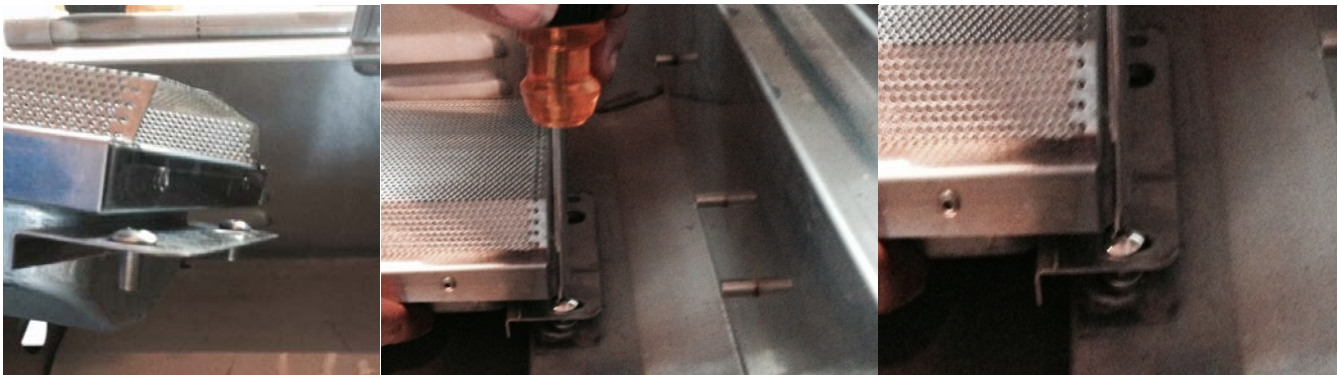

7.5.18